

EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[XPSATR1153P](#)

EN

This Datasheet is presented by
the manufacturer

DE

Dieses Datenblatt wird vom
Hersteller bereitgestellt

FR

Cette fiche technique est
présentée par le fabricant

XPSATR1153P

module XPSATR - Emergency stop and protective guard - 24V DC, time delay 3s



Main

Range of product	Preventa Safety automation
Product or component type	Preventa safety module
Safety module name	XPSATR
Safety module application	For emergency stop and protective guard applications
Function of module	Emergency stop monitoring 1-channel wiring Emergency stop monitoring 2-channel wiring Protective guard monitoring
Safety level	Can reach PL e/category 4 conforming to EN/ISO 13849-1 instantaneous safety outputs Can reach SILCL 3 conforming to EN/IEC 62061 time delay safety outputs
Safety reliability data	DC > 99 % conforming to EN/ISO 13849-1 MTTFd = 85 years conforming to EN/ISO 13849-1 PFHd = 2E-9 1/h conforming to EN/IEC 62061
Type of start	Automatic Manual
Connections - terminals	Captive screw clamp terminals, removable terminal block, clamping capacity: 1 x 0.25...1 x 2.5 mm ² flexible cable with cable end, without bezel Captive screw clamp terminals, removable terminal block, clamping capacity: 1 x 0.25...1 x 1.5 mm ² flexible cable with cable end, with bezel Captive screw clamp terminals, removable terminal block, clamping capacity: 2 x 0.25...2 x 1 mm ² flexible cable with cable end, without bezel Captive screw clamp terminals, removable terminal block, clamping capacity: 1 x 0.2...1 x 2.5 mm ² solid or flexible cable without cable end Captive screw clamp terminals, removable terminal block, clamping capacity: 2 x 0.2...2 x 1 mm ² solid or flexible cable without cable end Captive screw clamp terminals, removable terminal block, clamping capacity: 2 x 0.5...2 x 1.5 mm ² flexible cable with cable end, with bezel
Output type	Relay instantaneous opening 3 NO, volt-free Relay time delay opening 3 NO, volt-free
Number of additional circuits	1 NC
[Us] rated supply voltage	24 V DC (- 15...10 %)

Complementary

Synchronisation time between inputs	1 s
Power consumption in W	2.8 W DC
Input protection type	Internal, electronic
Time delay range	0.1...3 s
[Uc] control circuit voltage	24 V DC
Breaking capacity	3 A at 24 V (DC-13) for relay output
Output thermal current	6 A for instantaneous and time delay outputs
[Ith] conventional free air thermal current	8 A
Associated fuse rating	6 A fuse type gG for instantaneous and time delay outputs conforming to EN/IEC 60947-5-1, DIN VDE 0660 part 200
Minimum output current	10 mA for relay output
Minimum output voltage	17 V for relay output
Response time on input open	<= 20 ms
[Ui] rated insulation voltage	300 V
[Uimp] rated impulse withstand voltage	4 kV overvoltage category III conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1

	& 2
Local signalling	5 LEDs
Mounting support	35 mm symmetrical DIN rail
Product weight	0.33 kg


Environment

standards	EN 60204-1 EN/IEC 60947-5-1 EN/IEC 61496-1 EN/ISO 13849-1 EN 62061 EN 50156-1
product certifications	CSA TÜV UL
IP degree of protection	IP20 (terminals) conforming to EN/IEC 60529 IP40 (enclosure) conforming to EN/IEC 60529
ambient air temperature for operation	-25...55 °C
ambient air temperature for storage	-25...75 °C

Contractual warranty

Warranty period	18 months
-----------------	-----------

Dimensions

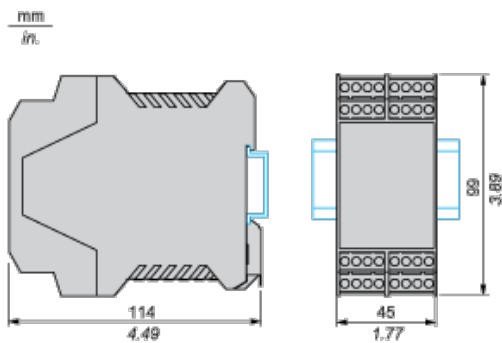

EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[XPSATR1153P](#)

EN

This Datasheet is presented by
the manufacturer

DE

Dieses Datenblatt wird vom
Hersteller bereitgestellt

FR

Cette fiche technique est
présentée par le fabricant