

# CSM-WN11122P

CSM

COLOR SENSORS

**SICK**  
Sensor Intelligence.



## Ordering information

| Type         | Part no. |
|--------------|----------|
| CSM-WN11122P | 1067293  |

Other models and accessories → [www.sick.com/CSM](http://www.sick.com/CSM)

## Detailed technical data

## Features

|  |                         |
|--|-------------------------|
| <b>Dimensions (W x H x D)</b>          | 12 mm x 31.5 mm x 21 mm |
| <b>Sensing distance</b>                | 12.5 mm <sup>1)</sup>   |
| <b>Housing design (light emission)</b> | Rectangular             |
| <b>Sensing distance tolerance</b>      | ± 3 mm                  |
| <b>Light source</b>                    | LED, RGB <sup>2)</sup>  |
| <b>Wave length</b>                     | 640 nm, 525 nm, 470 nm  |
| <b>Light spot size</b>                 | 1.5 mm x 6.5 mm         |
| <b>Light spot direction</b>            | Vertical                |
| <b>Adjustment</b>                      | Teach-in button         |
| <b>Teach-in mode</b>                   | 1-point-teach-in        |

<sup>1)</sup> From front edge of lens.<sup>2)</sup> Average service life: 100,000 h at  $T_U = +25^\circ\text{C}$ .

## Mechanics/electronics

|                            |                                   |
|----------------------------|-----------------------------------|
| <b>Supply voltage</b>      | 12 V DC ... 24 V DC <sup>1)</sup> |
| <b>Ripple</b>              | < 5 V <sub>pp</sub> <sup>2)</sup> |
| <b>Power consumption</b>   | < 50 mA <sup>3)</sup>             |
| <b>Switching frequency</b> | 1.7 kHz <sup>4)</sup>             |
| <b>Response time</b>       | 300 µs <sup>5)</sup>              |
| <b>Jitter</b>              | 150 µs                            |
| <b>Output type</b>         | NPN                               |

<sup>1)</sup> Limit values: DC 12 V (-10 %) ... DC 24 V (+20 %). Operation in short-circuit protected network max. 8 A.<sup>2)</sup> May not exceed or fall below  $U_Y$  tolerances.<sup>3)</sup> Without load.<sup>4)</sup> With light/dark ratio 1:1.<sup>5)</sup> Signal transit time with resistive load.<sup>6)</sup> At supply voltage > 24 V,  $I_{\max} = 30 \text{ mA}$ .  $I_{\max}$  is consumption count of all  $Q_n$ .

|  |   |
|--|---|
| <b>Switching output (voltage)</b>          | NPN: HIGH = approx. $V_S$ / LOW $\leq 2$ V  |
| <b>Output (channel)</b>                    | 1 color   |
| <b>Output current <math>I_{max}</math></b> | < 100 mA <sup>6)</sup>  |
| <b>Input, teach-in (ET)</b>                | NPN Teach: $U < 2$ V Run: $U = 10$ V ... $< U_V$ or open  |
| <b>Connection type</b>                     | Cable with M12 male connector, 4-pin, 0.2 m   |
| <b>Protection class</b>                    | III   |
| <b>Circuit protection</b>                  | $U_V$ connections, reverse polarity protected<br>Output Q short-circuit protected<br>Interference pulse suppression |
| <b>Enclosure rating</b>                    | IP67  |
| <b>Weight</b>                              | 25 g  |
| <b>Housing material</b>                    | ABS   |

1) Limit values: DC 12 V (-10 %) ... DC 24 V (+20 %). Operation in short-circuit protected network max. 8 A.

2) May not exceed or fall below  $U_V$  tolerances.

3) Without load.

4) With light/dark ratio 1:1.

5) Signal transit time with resistive load.

6) At supply voltage > 24 V,  $I_{max} = 30$  mA.  $I_{max}$  is consumption count of all  $Q_n$ .


## Ambient data

|                                      |                              |
|--------------------------------------|------------------------------|
| <b>Ambient operating temperature</b> | -10 °C ... +55 °C            |
| <b>Ambient storage temperature</b>   | -20 °C ... +75 °C            |
| <b>Shock load</b>                    | According to IEC 60068       |
| <b>UL File No.</b>                   | NRKH.E348498 & NRKH7.E348498 |

## Classifications


|                       |          |
|-----------------------|----------|
| <b>ECI@ss 5.0</b>     | 27270907 |
| <b>ECI@ss 5.1.4</b>   | 27270907 |
| <b>ECI@ss 6.0</b>     | 27270907 |
| <b>ECI@ss 6.2</b>     | 27270907 |
| <b>ECI@ss 7.0</b>     | 27270907 |
| <b>ECI@ss 8.0</b>     | 27270907 |
| <b>ECI@ss 8.1</b>     | 27270907 |
| <b>ECI@ss 9.0</b>     | 27270907 |
| <b>ETIM 5.0</b>       | EC001817 |
| <b>ETIM 6.0</b>       | EC001817 |
| <b>UNSPSC 16.0901</b> | 39121528 |

## Dimensional drawing (Dimensions in mm (inch))

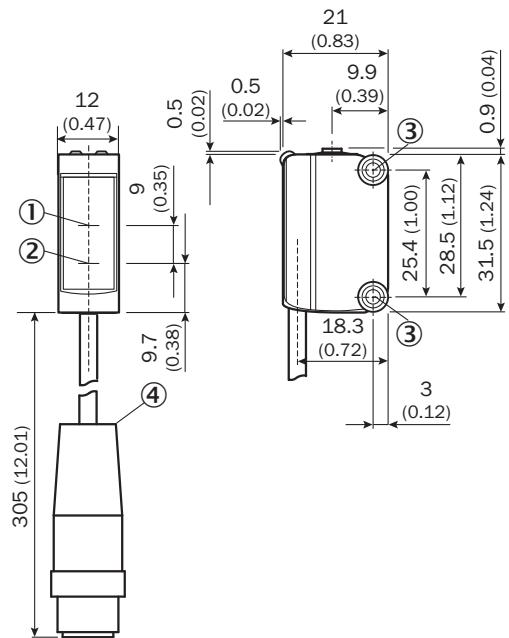

- ① Optical axis receiver
- ② Optical axis sender
- ③ M3 mounting hole
- ④ Cable with male connector


## Adjustments



- ① Status indicator LED, yellow: Status switching output Q
- ② LED indicator green: Supply voltage active
- ③ Teach-in button


## Connection diagram

Cd-092



## Concept of operation

### Setting the switching threshold

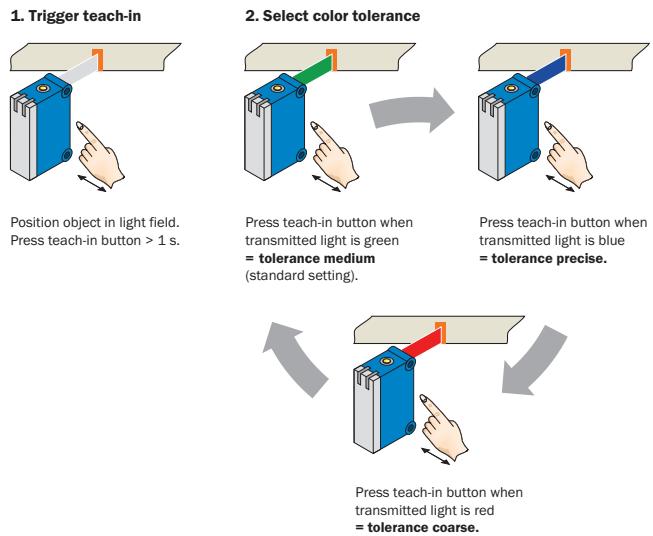


Teach-in can also be performed using an external control signal (only dynamic teach-in).

Keylock activation and deactivation: hold down teach-in button > 30 s.

Teach-in failure: yellow LED indicator and the transmitted light of the sensor flashing quickly.

## Characteristic curve

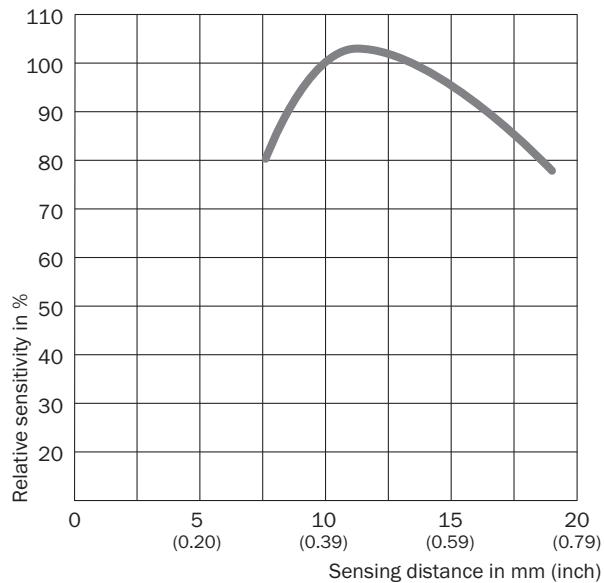

## Recommended accessories

Other models and accessories → [www.sick.com/CSM](http://www.sick.com/CSM)

|   | Brief description  | Type            | Part no. |
|---|--|-----------------|----------|
| Universal bar clamp systems   |  |                 |          |
|    | Universal clamp bracket for rod mounting, steel, zinc coated, without mounting hardware  | BEF-KHS-KH1     | 2022726  |
|    | Plate L for universal clamp bracket, steel, zinc coated, universal clamp and mounting hardware included  | BEF-KHS-L01     | 2023057  |
|    | Plate N08 for universal clamp bracket, Zinc plated steel (sheet), Zinc die cast (clamping bracket), Universal clamp (5322626), mounting hardware     | BEF-KHS-N08     | 2051607  |
|    | Plate N08N for universal clamp bracket, Stainless steel 1.4571 (sheet), Stainless steel 1.4408 (clamp), Universal clamp (5322626), mounting hardware | BEF-KHS-N08N    | 2051616  |
|    | Mounting bar, straight, 200 mm, steel, steel, zinc coated, without mounting hardware   | BEF-MS12G-A     | 4056054  |
|    | Mounting bar, straight, 300 mm, steel, steel, zinc coated, without mounting hardware   | BEF-MS12G-B     | 4056055  |
|    | Mounting bar, L-shaped, 150 mm x 150 mm, steel, steel, zinc coated, without mounting hardware  | BEF-MS12L-A     | 4056052  |
|    | Mounting bar, L-shaped, 250 x 250 mm, steel, steel, zinc coated, without mounting hardware   | BEF-MS12L-B     | 4056053  |
| Device protection (mechanical)  |  |                 |          |
|   | Stainless steel 1.4301 (SVS 304), 3 mm thick protective sleeve for G6, stainless steel 1.4301, mounting hardware included                            | BEF-SG-G6       | 2069044  |
| Mounting brackets and plates  |  |                 |          |
|  | Mounting bracket for wall mounting, Stainless steel, mounting hardware included  | BEF-W100-A      | 5311520  |
|  | Mounting bracket for floor mounting, steel, zinc coated, mounting hardware included  | BEF-W100-B      | 5311521  |
|   | Mounting bracket for W100 with specific bore-hole arrangements, steel, zinc coated   | BEF-WN-W100-S01 | 4073866  |
|  | Adapter plate KT3 to KTM, Stainless steel, fastening screws included   | BEF-AP-KTMS01   | 2068786  |
| Plug connectors and cables  |  |                 |          |
|  | Head A: female connector, M12, 4-pin, straight<br>Head B: cable<br>Cable: PVC, unshielded, 2 m   | DOL-1204-G02M   | 6009382  |
|   | Head A: female connector, M12, 4-pin, straight<br>Head B: cable<br>Cable: PVC, unshielded, 5 m   | DOL-1204-G05M   | 6009866  |
|  | Head A: female connector, M12, 4-pin, angled<br>Head B: cable<br>Cable: PVC, unshielded, 2 m   | DOL-1204-W02M   | 6009383  |
|   | Head A: female connector, M12, 4-pin, angled<br>Head B: cable<br>Cable: PVC, unshielded, 5 m   | DOL-1204-W05M   | 6009867  |
|  | Head A: female connector, M12, 4-pin, straight<br>Head B: -<br>Cable: unshielded   | DOS-1204-G      | 6007302  |

|   | <b>Brief description</b>   | <b>Type</b> | <b>Part no.</b> |
|---|--|-------------|-----------------|
|  | Head A: female connector, M12, 4-pin, angled<br>Head B: -<br>Cable: unshielded | DOS-1204-W  | 6007303         |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

**For us, that is "Sensor Intelligence."**

## WORLDWIDE PRESENCE:

Contacts and other locations [www.sick.com](http://www.sick.com)